


# BRA FLEX PROTECT

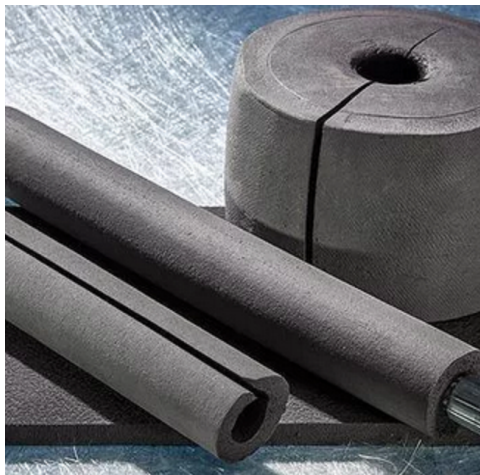

BRA-FLEX® Protect is suitable for the insulation of complex line and piping systems as well as for the insulation of components, flanges, and fittings.

It is available in both **\*\*vulcanized and unvulcanized\*\*** conditions. The product portfolio includes sheets, hoses, and customized vulcanized molded elements.

Property	Value	Unit	Imperial
Temperature resistance (short-term)	500	°C	842 °F
Temperature resistance (long-term)	260	°C	500 °F
Thermal conductivity	0.05	W/mK	0.03 btu/ft h °F



The information in this publication, as well as any additional information provided to users, is based on experience and is shared to the best of our current knowledge. However, due to numerous factors beyond our knowledge and control that may affect the use of these products, no warranties are provided or implied regarding this information. The operating limits presented in this publication do not imply that these values can be applied simultaneously. Do not use the product at the maximum temperature and pressure values simultaneously. The maximum temperature is suitable only for short-term exposure under specific conditions. Specifications are subject to change without prior notice. The picture in the DS may not accurately depict the exact color and/or markings of the product.

**Planichem s.r.l.**

Via Consolare 41/43 25030 Zocco di Erbusco (BS) - ITALY

Tel: +39 030 7386033 - [www.planichem.com](http://www.planichem.com) - [info@planichem.com](mailto:info@planichem.com)