
PLANICHEM
SICHEM SOLUTIONS

BRA-GLA 3

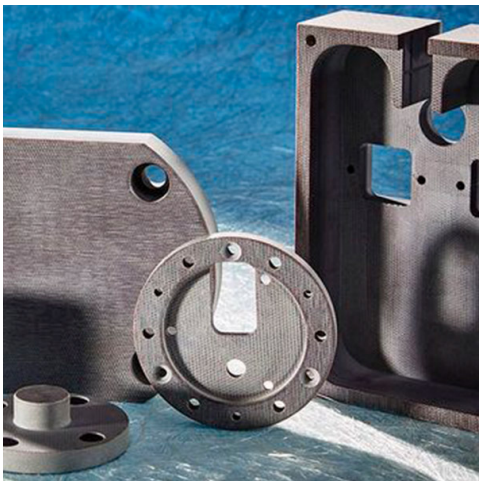

BRA GLA® 3 is a thermosetting plastic material reinforced with glass fiber. Its unique composition combines excellent insulating strength with outstanding mechanical and thermal properties.

Material Specifications:

- Long-term temperature resistance
- High-pressure resistance
- Dimensional stability

Fields of Application

BRA GLA® 3 is used as an insulating sheet or mechanical component in presses for the rubber, plastic, and wood molding industries. BRA GLA® 3 withstands high operating temperatures and offers greater dimensional stability compared to BRA GLA® N. It is used as an insulator in presses with heated plates and for molds.

Supply Details

- Standard Thickness: 5-45 mm
- Premium Finish Available

The values in this technical data sheet are standard values and are not part of any contract. Specifications may change depending on modifications in the operating environment.

The information in this publication, as well as any additional information provided to users, is based on experience and is shared to the best of our current knowledge. However, due to numerous factors beyond our knowledge and control that may affect the use of these products, no warranties are provided or implied regarding this information. The operating limits presented in this publication do not imply that these values can be applied simultaneously. Do not use the product at the maximum temperature and pressure values simultaneously. The maximum temperature is suitable only for short-term exposure under specific conditions. Specifications are subject to change without prior notice. The picture in the DS may not accurately depict the exact color and/or markings of the product.

Planichem s.r.l.
Via Consolare 41/43 25030 Zocco di Erbusco (BS) - ITALY
Tel: +39 030 7386033 - www.planichem.com - info@planichem.com